

R1275T



R1275T is a flooded Lead Acid battery that adopts Tubular Plate technology to offer high reliability and performance. It is specially designed for frequent deep cycle discharge. The Battery is designed and manufactured according to GB/T 32620-2016 standards and with die-casting positive spine and patent formula of active material. Suitable for mobility scooters, electric wheel chairs, golf buggies etc.




Specification

Voltage Per Unit	12V
Capacity	152Ah@20hr-rate to 1.65V per cell @25°C 128Ah@5hr-rate to 1.65V per cell @25°C
Approx Weight	Including electrolyte 41.0 Kg
Internal Resistance	Approx. 6.0mΩ
Operating Temperature Range	Discharge:-40°C~60°C Charge:-20°C~50°C Storage:-40°C~60°C
Optimal Operating Temperature Range	25°C ± 5°C
Float charging Voltage	13.8 to 14.4 VDC/unit Average at 25°C
Maximum Charging Current	25A
Cycle Service	15.3 to 15.9 VDC/unit Average at 25°C
Self Discharge	Self-discharge rate less than 3.5% per month at 25°C. Please charge batteries before using.
Container Material	PP



Dimensions

Unit: mm Dimension: 328(L) × 182(W) × 297(H)

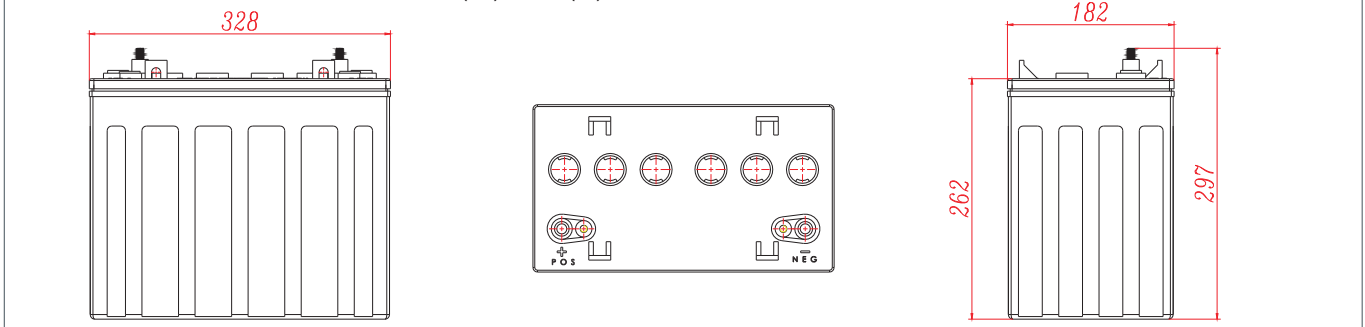


Constant Current Discharge Characteristics: A(25°C)										
F.V/Time	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
9.60V	118.4	82.9	48.0	34.4	29.3	26.3	22.8	17.8	14.7	7.9
9.90V	115.7	81.0	46.9	33.6	28.7	25.7	22.3	17.4	14.3	7.6
10.2V	112.5	78.8	45.6	32.7	27.9	25.0	21.7	16.9	13.9	7.3
10.5V	108.2	75.7	43.9	31.4	26.8	24.0	20.8	16.2	13.4	7.0
10.8V	103.3	72.3	41.9	30.0	25.6	23.0	19.9	15.5	12.8	6.7
11.1V	97.8	68.5	39.7	28.4	24.3	21.8	18.9	14.7	12.1	6.1


Constant Power Discharge Characteristics: W(25°C)										
F.V/Time	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
9.60V	1328.8	958.1	566.2	409.2	349.8	314.0	272.2	212.1	175.4	94.4
9.90V	1304.9	938.3	554.5	401.6	343.0	307.9	266.9	208.0	171.9	91.7
10.2V	1283.1	913.4	539.8	391.6	334.2	300.0	260.0	202.5	167.3	88.3
10.5V	1235.0	878.7	519.2	376.6	321.4	288.5	250.0	194.7	160.8	84.1
10.8V	1180.3	843.6	498.5	359.6	307.2	275.5	238.8	185.9	153.6	80.4
11.1V	1124.8	805.4	476.0	341.1	291.1	261.1	226.3	176.2	145.5	74.2

All mentioned values are average values (Tolerance ±2%)


Life characteristics of cyclic use

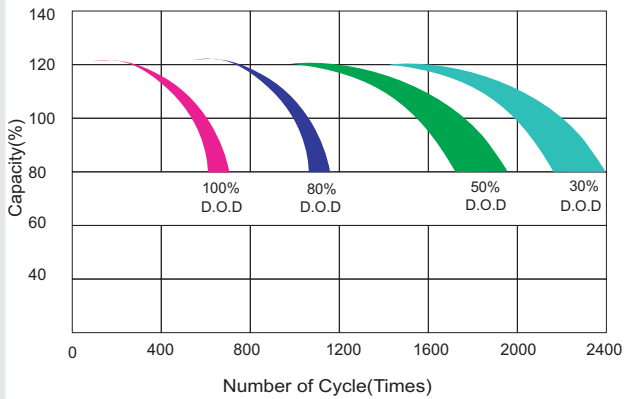


Storage characteristic

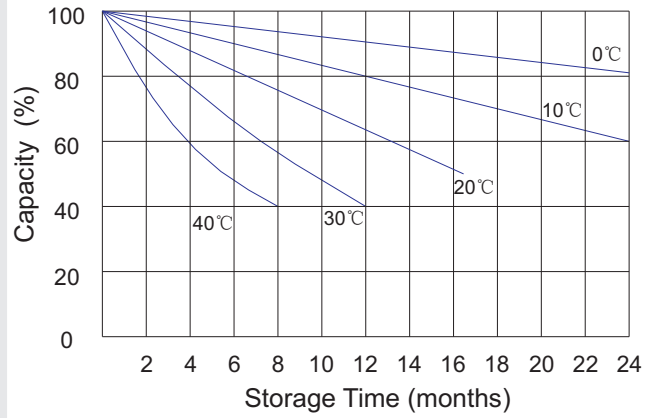

Charge characteristic Curve for standby use

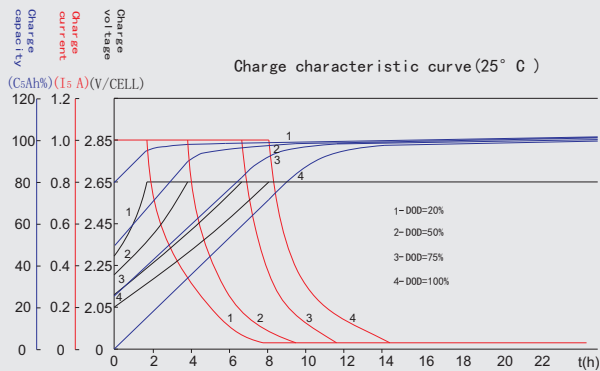

Discharge characteristic Curve

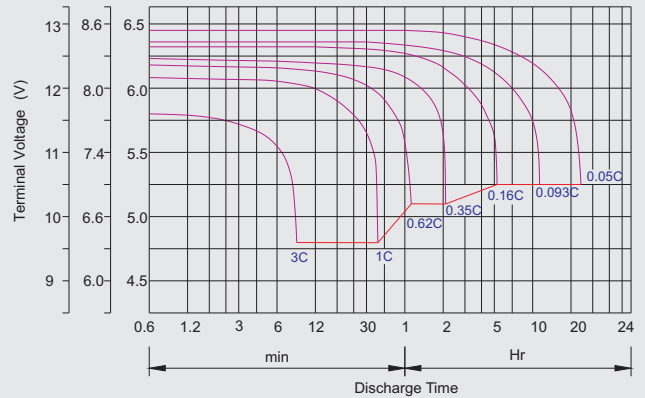

Discharge Current VS. Discharge Voltage

Final D ischarge Voltage V /cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method(C=C₅):

Constant Voltage	0.2Cx2h+2.65V/cellx12h, Max. Current 0.2C
Constant Current	0.14Cx6h+0.07Cx6h

Maintenance & Cautions

Cycle service
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.2-1.3 times discharge capacity.
※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
Generally speaking, the most important factors is depth of discharge.