



**CERTIFICATIONS**  
 UL1642 (Cell), CE (Pack), IEC62133 (Cell), UN38.3 (Cell / Pack), IEC62619 (Cell), ROHS (Cell)



**MODEL: ALG12-240**

**Specifications**

Electrical Specifications	Nominal Voltage	12.8V	
	Nominal Capacity	240 Ah	
	Nominal Power	3072 Wh	
	Parallel Connection	max 6 units	
	Series Connection	max 4 units	
	Circuit Protection	Overcharge, over discharge, over current, high temperature, short circuit, cell balancing	
	Cycle life	3000 cycles @100% DOD 6000 cycles @80%DOD	
Charge Specifications	Charge Profile	CC @ 0.2C to 14.4V, then CV @ 14.4V until current $\leq 0.01C$ (CC/CV)	
	Max Charge Voltage	14.4 $\pm$ 0.2V	
	Standard Current	48A	
	Max Current	120A	
Discharge Specifications	Standard Current	48A	
	Max Continuous Current	200A	
	Cut-off Voltage	10V	
Environmental Specifications	Charge Temperature	0°C to 55°C	60 $\pm$ 25% Relative Humidity
	Discharge Temperature	-20°C to 60°C	
	Storage Temperature	-5°C to 45°C	
Mechanical Specifications	Dimensions, mm	490x171x240 (Group 49)	
	Approx Weight, kg	23	
	Terminal type	M8	
	Case Material	Plastic ABS	
	IP Rating	IP65	
	Cell Type	Cylindrical LiFePO <sub>4</sub>	

Circuit Protection	Characteristic	Parameters
Overcharge protection	High voltage protection	15V $\pm$ 0.15V
	Reset/Recovery voltage	14.2V $\pm$ 0.15V
	Reset trigger	below reset value
	Time delay	5s
Over discharge protection	Low voltage protection	8.8V $\pm$ 0.15V
	Reset/Recovery voltage	10.8V $\pm$ 0.15V
	Reset trigger	Cut Load, Auto release
	Time delay	5s
Overcurrent	Max discharge current protection	800A $\pm$ 50A
	Discharge current protection reset	Cut Load, Auto release
	Time delay	300mS

Circuit Protection	Characteristic	Parameters
High temperature	Max charge temperature	65°C $\pm$ 3°C
	Recovery point	45°C $\pm$ 3°C
	Time delay	10s
	Max discharge temperature	65°C $\pm$ 3°C
	Recovery point	45°C $\pm$ 3°C
	Time delay	10s
MOSFET over temperature protection	MOSFET over temperature protection	90°C $\pm$ 5°C
	Time delay	10s
Cell balance	Balance condition voltage (per cell)	$\geq$ 3.6V
	Cell balance current	116 $\pm$ 10mA
Short circuit protection	Short circuit protection	2100A
	Time delay	$\leq$ 800 $\mu$ s




**CERTIFICATIONS**  
 UL1642 (Cell), CE (Pack), IEC62133 (Cell), UN38.3 (Cell / Pack), IEC62619 (Cell), ROHS (Cell)




**MODEL: ALG12-240**

**Characteristics Curve**


**Charging Characteristics (0.5C @25°C)**

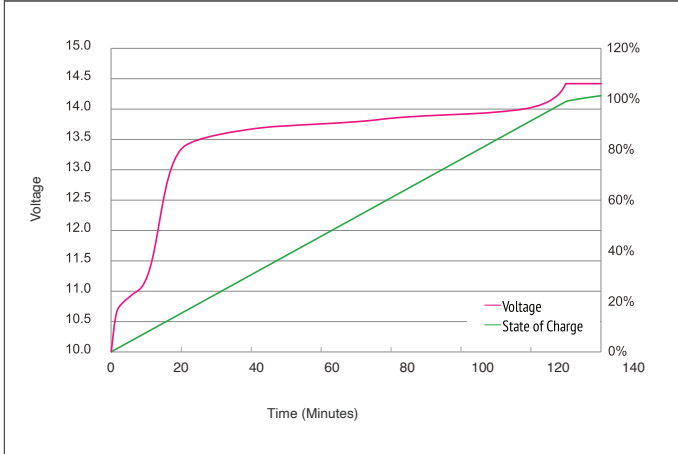


**Discharging Characteristics (0.2C, 0.5C, 1C @25°C)**

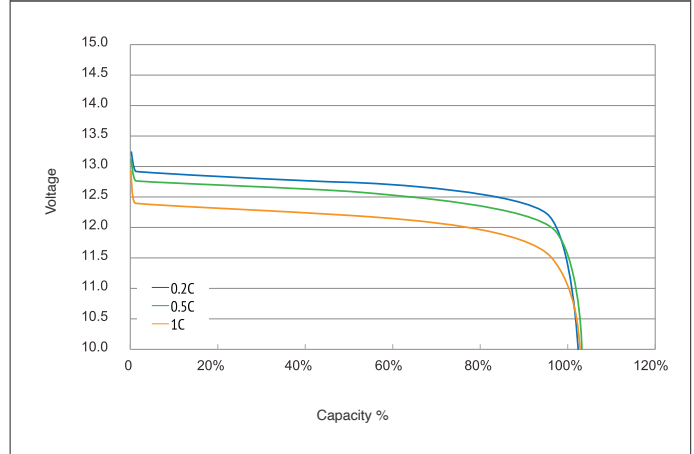


**Different Temperature Capacity Curve**

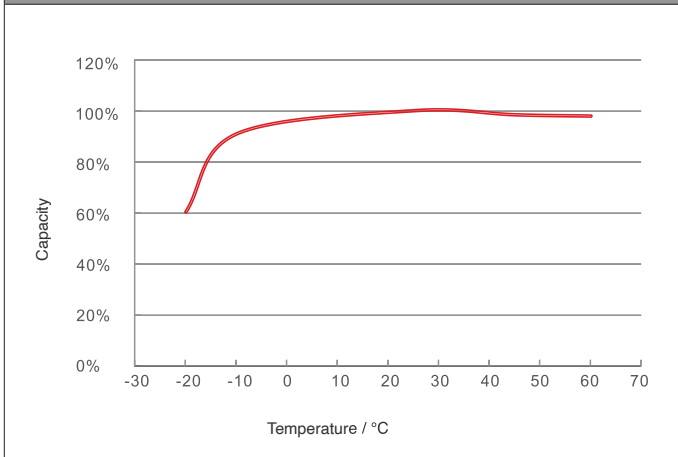

**Typical Charge Time Curve**

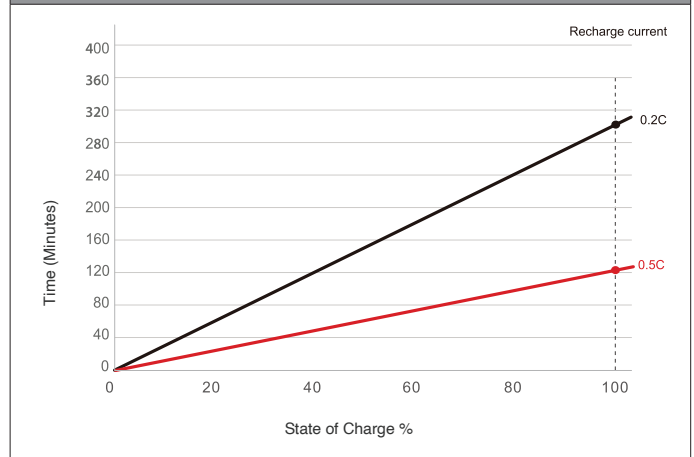

**Different Temperature Self Discharge Curve**

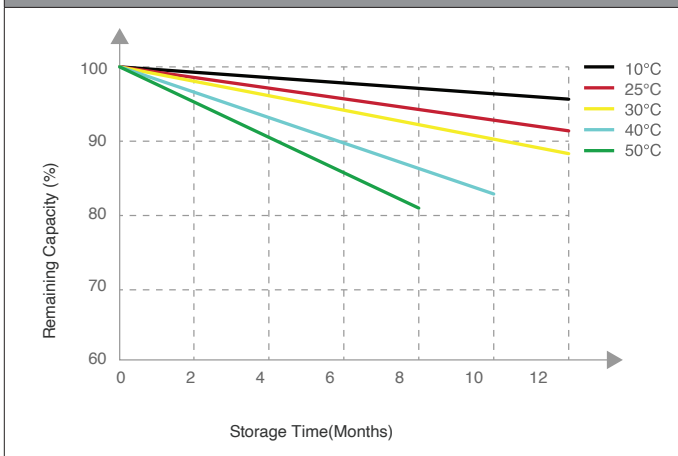

**Different DOD Discharge Cycle Life Curve**

